

PARI SD

OPAL DIFFUSER



220-240V AC / DC 50/60Hz LED 3000K / CRI>80 Design: INHOUSE

LED Aufbauleuchte aus Aluminiumprofil · Oberfläche lackiert oder eloxiert · Opale PMMA Abdeckung kubisch
 LED surface luminaire from aluminium profile · surface painted or anodized · opal PMMA diffuser cubic
 Lampada LED a plafone con profilo in alluminio · Superficie verniciata o anodizzata · Diffusore PMMA opale cubico
 Plafonnier LED en profilé d'aluminium · surface lacquée ou anodisée · Diffuseur PMMA opal cubique

SYS 15W	L: 600mm	LM
576-019XY		1460

SYS 21W	L: 900mm	LM
576-029XY		2190

SYS 28W	L: 1200mm	LM
576-039XY		2920

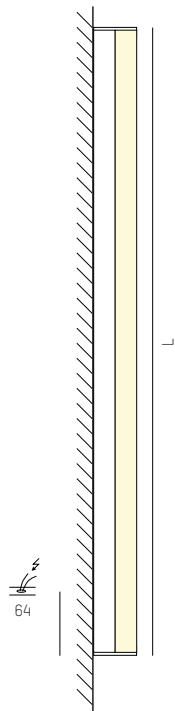

IP 43

COMPLETE CODE	
X = COLOUR	Y = DIMMABLE
<ul style="list-style-type: none"> chrome = 1 white = 5 alu anodized = 8 	<ul style="list-style-type: none"> switchable = no addition Analog dimm. 1 - 10V = code + ad