



## INTERO ECO 600 / 625 R



220-240V AC      50/60Hz      **UGR<19**      Design: INHOUSE

LED Einbauleuchte aus Stahlblech · Oberfläche pulverbeschichtet · Lichteinsatz wechselbar · inkl. Konverter · Steckfertig mit 5 pol. Adels Stecker  
 LED recessed luminaire made of sheet steel - powder-coated surface - light insert can be changed - incl. converter - ready to plug in with 5-pin Adels plug  
 Lampada LED ad incasso in lamiera d'acciaio · verniciata a polveri · Inserti luce intercambiabili · converter incluso · Plug&Play con spina 5 poli Adels  
 Luminaire encastrée LED - Surface revêtue de poudre - Inserts lumineux interchangeables - Convertisseur inclus - Plug&Play avec fiche Adels à 5 broches

**SYS 18 - 36W** L: 597 x W 597mm | **LM**  
**712-01170112WW05Y** | 2358 - 4780  
 Strom einstellbar 18 - 36W (350 - 700mA)  
 Power switchable 18 - 36W (350 - 700mA)  
 Austrahlwinkel: 2 x 80° / Beam angle: 2 x 80°

**SYS 18 - 36W** L: 620 x W 620mm | **LM**  
**712-01180112WW05Y** | 2358 - 4780  
 Strom einstellbar 18 - 36W (350 - 700mA)  
 Power switchable 18 - 36W (350 - 700mA)  
 Austrahlwinkel: 2 x 80° / Beam angle: 2 x 80°

<b>BEFESTIGUNGSKLAMMERN</b>	<b>SET</b>
<b>MOUNTING CLAMBS</b>	<b>SET</b>
<b>712-0595000000000</b>	4 pcs.

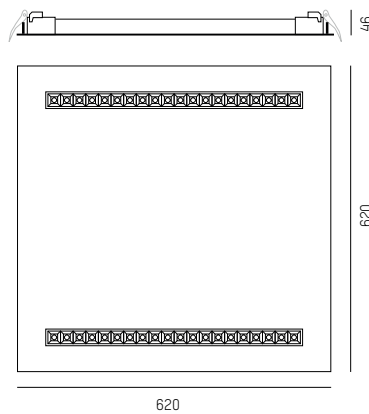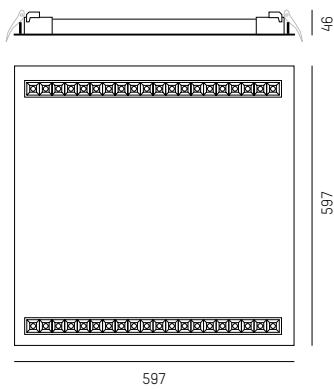

579 x 579mm  
 76mm  
 12,5 - 45mm

604 x 604mm  
 76mm  
 12,5 - 45mm

IP 20



COMPLETE CODE	
<b>WW</b> = LIGHT COLOUR	<b>Y</b> = DIMMABLE
LED 3000K = <b>19</b> CRI<80	switchable = <b>0</b>
LED 4000K = <b>14</b> CRI<80	DALI dimm. = <b>d</b>