



Product Environmental Profile of luminaires for indoor lighting Plato family

Reference product: Plato 6x6 Opal DALI



General information

Company information

Elektroskandia Sverige AB
191 83 Sollentuna, Sweden
www.cardi.se
Author: Peder Wibom (peder.wibom@cardi.se)

Environmental commitments

CARDI develops and manufactures, luminaires that meets the markets standards and environmental requirements. based on the latest LED technology enclosed in the most sustainable materials. Research and development take place continuously in order to meet the requirements of the future.

In times of global warming, efforts are needed to make a difference. CARDI's commitment to reducing carbon dioxide emissions is based on being at the development forefront of environmentally friendly and energy-saving products.

Reference product

Plato 6x6 Opal DALI (595x595x9.5mm)

The assessed products range covers indoor lighting luminaires from the Plato family. The luminaires are used for professional lighting of indoor commercial applications, mainly for commercial buildings, offices and shopping malls.

Functional unit

The functional unit for this PEP is compliant with PSR rules, and is defined as follow:
"Provide lighting that delivers an outgoing artificial luminous flux of 1,000 lumens during a reference lifetime of 35,000 hours"

Calculations of environmental impacts of the manufacturing, distribution, installation, use and end-of-life stages are carried out as follows for each life cycle stages:

Environmental impacts of PEP (for 1000 lumens over 35000 hours)=

Environmental impacts of the reference product x (1000/5150) x (35000/100000) = Reference product environmental impacts x 0.068



Homogeneous environmental family:

The reference product represents the Plato luminaires family, which differs in terms of power and useful output flux (lumens) of the integrated LED installed in the luminaires.

The range of variations for the products in the same family are the following:

| Plato family | System power (W) | Luminous flux (lm) | Product mass (kg) |
|----------------------------|------------------|--------------------|-------------------|
| Plato 6x6 Opal | 41 | 5 150 | 3 875 |
| Plato 6x6 Opal DALI | 41 | 5 150 | 3 971 |
| Plato 6x6 Prisma | 41 | 4 760 | 3 875 |
| Plato 6x6 Prisma DALI | 41 | 4 760 | 3 971 |
| Plato 3x3 Opal | 15 | 1 750 | 1 228 |
| Plato 3x3 Opal DALI | 15 | 1 750 | 1 312 |
| Plato 3x3 Prisma | 15 | 1 720 | 1 228 |
| Plato 3x3 Prisma DALI | 15 | 1 720 | 1 312 |
| Plato 3x12 Opal | 41 | 5 210 | 4 012 |
| Plato 3x12 Opal DALI | 41 | 5 210 | 4 108 |
| Plato 3x12 Prisma | 41 | 4 870 | 4 012 |
| Plato 3x12 Prisma DALI | 41 | 4 870 | 4 108 |
| Plato 6x6 Nano | 41 | 5 530 | 3 875 |
| Plato 6x6 Nano DALI | 41 | 5 530 | 3 971 |
| Plato 6x6 Nano FS | 41 | 3 830 | 3 875 |
| Plato 6x6 Nano FS DALI | 41 | 3 830 | 3 971 |
| Plato 6x6 Opal Sense BT | 30 | 3 650 | 3 923 |
| Plato 6x6 Prisma Sense BT | 30 | 3 650 | 3 923 |
| Plato 6x6 Nano Sense BT | 30 | 4 120 | 3 923 |
| Plato 6x6 Opal IP65 | 35 | 3 580 | 4 875 |
| Plato 6x6 Opal IP65 DALI | 45 | 4 420 | 4 955 |
| Plato 6x6 Prisma IP65 | 35 | 3 310 | 4 875 |
| Plato 6x6 Prisma IP65 DALI | 45 | 4 090 | 4 955 |
| Plato 6x6 Nano IP65 | 35 | 3 810 | 4 875 |
| Plato 6x6 Nano IP65 DALI | 45 | 4 670 | 4 955 |
| Plato 6x6 TW DALI DT8 | 45 | 4 540 | 4 074 |



Description of reference product

| Specification | Unit | Value |
|-------------------------------|----------------------------|--|
| Product category | - | Indoor lighting products supplied with light source and control gear |
| Product name | - | Plato 6x6 Opal DALI |
| Light Source / Lifetime @ L90 | Hours | 100 000 |
| Color temperature | K | 3000 / 4000 / 5000 |
| Color rendering | Ra | 90 |
| Luminous flux | Lm | 5150 |
| Luminous efficiency | Lm/W | 125.6 |
| Ingress protection | IP | 44 |
| Flicker | % (IEEE1789) / SVM / PstLM | <3% / <0,4 SVM / <1,0 |
| Operating voltage | VAC | 220-240 |
| Unified Glare Rating | UGR | <22 |
| Dimensions | mm | 595x595x9,5 |

The geographical scope for this PEP was based on the following considerations:

- Technological representativeness takes place in Sweden and China, 2024.
- Supply of the raw materials take place in Europe, China and US while assembly of the products take place in China.
- Distribution centers in which storage takes place in Sweden.
- Installation, use and end-of-life of the products take place in Sweden.



Constituent material


The list below includes materials with a certain amount of recycled content, in order to reduce the impacts linked to production of original material.

In particular:

The main body of the luminaire is made of 100% of recycled PC, PMMA and extruded aluminum;

The cardboard box of packaging is made of 85% of recycled content.

Total weight of reference product 3971g(packaging included)

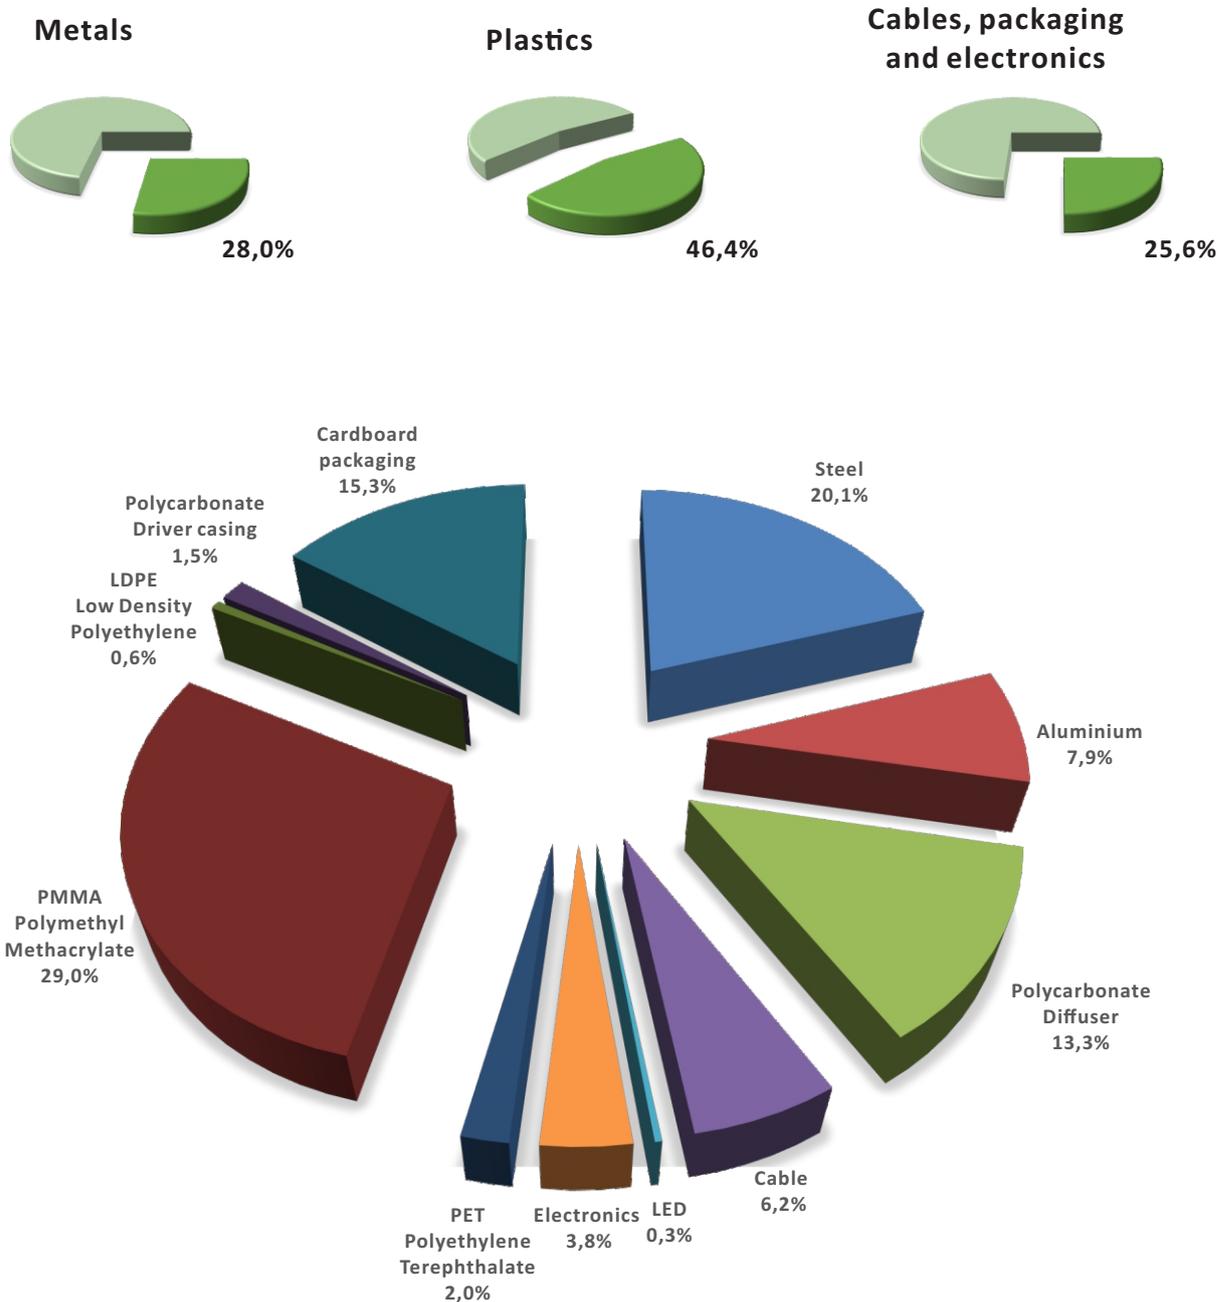



Manufacturing

Luminaires and control gears are manufactured and assembled in Luminans Dongguan China.

The aluminum and plastic used comes from 100% recycle material.

The treatment of the losses in production are:

Turning of steel parts, casting of aluminum, injection of plastic, soldering of SMD components, HAL finishing and PWB, solder mask deposition.

The upstream transport used during the manufacturing phase is: Europe to China by Boat and Truck, Asia to China by Truck, Local China by Truck.

The environmental management system is Certified according to ISO14001 and ISO 9001.

All lighting products manufactured by Luminans comply to the European directive "2011/65/EU RoHS 2.0 - Restriction of dangerous substances in electrical and electronic equipment".

Energy used: Electricity Mix; high voltage; 2018; Chine, CN.



Distribution

Products leaving the manufacturing in Dongguan, China by sea with 19,000km, arriving in Sweden then delivered directly to the client's logistics centers by truck 1,000km.

The logistics centers are strategically located to optimize transport efficiency, both in terms of transport distance and means of transport.

The warehouse buildings have been appointed the status of Environmental Building Silver according to Sweden Green Building Council. *All transports are affiliated with Fair Transport and the CO₂ reporting from the transports are in accordance with the Global Logistics Emissions Councils (GLEC) framework.

During 2022, 70% of the goods were transported with vehicles running on HVO100 (Hydrotreated Vegetable Oil) made from 100% renewable resources and is free from any fossil fuels. During 2023 electrical trucks will be introduced to further lower the climate impact.

*This specific fuel wasn't modeled due to lack of data.



Installation

The luminaires are provided to the client with control gear for installation, if wiring/connectors are available at point of installation, no further accessories are necessary. Only standard tools might be necessary for connection.

The EoL treatment of the cardboard packaging used is mainly recycled, partially incinerated and landfill.

Energy used: Electricity Mix; Low voltage; 2018; Sweden, SE.



Use

Energy efficient LED light source with an energy efficiency class of "C" according to the energy labeling regulation (EU) 2019/2015. The light source is integrated in the luminaire.



The use phase consists of electricity use during the whole lifetime of the product.

The assigned lifetime of the luminaire according to L90 = 100 000 hours.

The Plato family luminaires are equipped with a light management system (named "DIP Switch Power Setting") capable of reducing electricity consumption by switching the power (3 steps, P_{max} 100% / 70% / 50%) during use.

Energy used: Electricity Mix; Low voltage; 2018; Sweden, SE.



End of life

The product end of life factors is taken into consideration during the design phase. Dismantling and sorting of components or material is made as easy as possible with the perspective, ease of recycling.

the EoL treatment of the product used is mainly recycled, partially incinerated and landfill.



Elements to process specifically:

In accordance with the requirements of this Directive, the electronic components can contain traces of heavy metals which must be removed and sent to specific channels for processing in compliance with the WEEE Directive 2012/19/EU:

- All brominated flame retardants have been replaced with non-toxic alternatives.

Energy used: Electricity Mix; Low voltage; 2018; Sweden, SE.

According to the data available at the issuing of this report, waste treatment scenarios are as follows:
(Reference info by link: <https://kunskapsrummet.com/en/sustainability-report-2022/>)
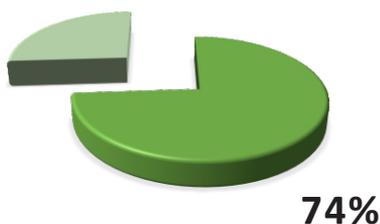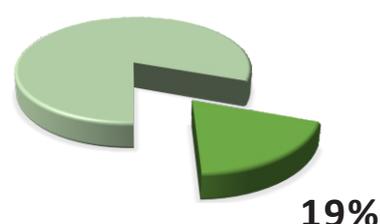
| Proportion of luminaire | WEEE waste (Sweden) | Assumption |
|---|---|---|
|  <p>74%</p> | <p>Recycling</p> | <p>Transport (100km) and handling of waste based on included materials.</p> |
|  <p>19%</p> | <p>Incineration with waste energy recovery</p> | <p>Transport (100km) and handling of waste based on included materials.</p> |
|  <p>7%</p> | <p>Landfill</p> | <p>Transport (100km) and handling of waste based on included materials.</p> |



Environmental impacts

The evaluation of environmental impacts examines the stages of the reference product life cycle: manufacturing, distribution, installation, use and end of life.

For each phase, the following modelling elements were taken into consideration:

| | |
|---|---|
| Unless otherwise specified, the energy models are those integrated in the modules used from the EIME database | |
| Manufacture | Material and components of the product, energy consumption, transports, packaging and the waste generated by the manufacturing. |
| Distribution | Transport between the factory and the final clients. |
| Installation | The end of life of the packaging. |
| Use | <ul style="list-style-type: none"> - Product category: Indoor lighting products and control gear - Use scenario: 5000 hours per year for commercial application. - Swedish energy Mix. |
| End of life | The default end of life scenario according to indicators for PEP EF 3.0 (Compliance: PEP ed.4, EN15804+A2) v2.0 |
| Software and database used | EIME v6.1.2-13 Database CODDE-2023-02 |



Extrapolation

The extrapolation coefficients are given for the environmental impact of the FU, which is the emission of an outgoing artificial luminous flux of 1,000 lumens over 35,000 hours. For each life cycle stage, the environmental impacts of the product are calculated by multiplying the reference product impacts of the declaration with the extrapolation coefficient. The "Total" column shall be calculated by adding the environmental impacts of each life cycle stage."

The extrapolation coefficients calculation at the FU level shall use the following formula:

$$\text{Extrapolation coefficient at the product level} \times \left(\frac{\text{Lighting output of reference product (lm)}}{\text{Lighting output of product concerned (lm)}} \right)$$

| Plato family | System power (W) | Luminous flux (lumens) | Product mass (kg) | Structure mass (kg) | Mass of control gear (kg) | Light source mass (kg) | Mass lighting management (kg) | Packaging mass (kg) |
|--------------------------|------------------|------------------------|-------------------|---------------------|---------------------------|------------------------|-------------------------------|---------------------|
| Plato 6x6 Opal DALI | 41 | 5150 | 3,971 | 2,983 | 0,368 | 0,013 | 0,113 | 0,607 |
| Plato 6x6 Opal | 41 | 5150 | 3,875 | 2,983 | 0,272 | 0,013 | 0,109 | 0,607 |
| Plato 6x6 Prisma | 41 | 4760 | 3,875 | 2,983 | 0,272 | 0,013 | 0,109 | 0,607 |
| Plato 6x6 Prisma DALI | 41 | 4760 | 3,971 | 2,983 | 0,368 | 0,013 | 0,113 | 0,607 |
| Plato 3x3 Opal | 15 | 1750 | 1,228 | 0,77 | 0,226 | 0,007 | 0,086 | 0,225 |
| Plato 3x3 Prisma | 15 | 1720 | 1,228 | 0,77 | 0,226 | 0,007 | 0,086 | 0,225 |
| Plato 3x3 Opal DALI | 15 | 1750 | 1,312 | 0,77 | 0,31 | 0,007 | 0,089 | 0,225 |
| Plato 3x3 Prisma DALI | 15 | 1720 | 1,312 | 0,77 | 0,31 | 0,007 | 0,089 | 0,225 |
| Plato 3x12 Opal | 41 | 5210 | 4,012 | 3,095 | 0,272 | 0,013 | 0,109 | 0,632 |
| Plato 3x12 Prisma | 41 | 4870 | 4,012 | 3,095 | 0,272 | 0,013 | 0,109 | 0,632 |
| Plato 3x12 Opal DALI | 41 | 5210 | 4,108 | 3,095 | 0,368 | 0,013 | 0,113 | 0,632 |
| Plato 3x12 Prisma DALI | 41 | 4870 | 4,108 | 3,095 | 0,368 | 0,013 | 0,113 | 0,632 |
| Plato 6x6 Nano | 41 | 5530 | 3,875 | 2,983 | 0,272 | 0,013 | 0,109 | 0,607 |
| Plato 6x6 Nano DALI | 41 | 5530 | 3,971 | 2,983 | 0,368 | 0,013 | 0,113 | 0,607 |
| Plato 6x6 Nano FS | 41 | 3830 | 3,875 | 2,983 | 0,272 | 0,013 | 0,109 | 0,607 |
| Plato 6x6 Nano FS DALI | 41 | 3830 | 3,971 | 2,983 | 0,368 | 0,013 | 0,113 | 0,607 |
| Plato 6x6 Opal Sense BT | 30 | 3650 | 3,923 | 2,983 | 0,302 | 0,013 | 0,115 | 0,625 |
| Plato 6x6 Prisma Sense B | 30 | 3650 | 3,923 | 2,983 | 0,302 | 0,013 | 0,115 | 0,625 |
| Plato 6x6 Nano Sense BT | 30 | 4120 | 3,923 | 2,983 | 0,302 | 0,013 | 0,115 | 0,625 |
| Plato 6x6 Opal IP65 | 35 | 3580 | 4,875 | 3,51 | 0,7 | 0,013 | 0,126 | 0,652 |
| Plato 6x6 Prisma IP65 | 35 | 3310 | 4,875 | 3,51 | 0,7 | 0,013 | 0,126 | 0,652 |
| Plato 6x6 Nano IP65 | 35 | 3810 | 4,875 | 3,51 | 0,7 | 0,013 | 0,126 | 0,652 |
| Plato 6x6 Opal IP65 DALI | 45 | 4420 | 4,955 | 3,51 | 0,78 | 0,013 | 0,138 | 0,652 |
| Plato 6x6 Prisma IP65 DA | 45 | 4090 | 4,955 | 3,51 | 0,78 | 0,013 | 0,138 | 0,652 |
| Plato 6x6 Nano IP65 DALI | 45 | 4670 | 4,955 | 3,51 | 0,78 | 0,013 | 0,138 | 0,652 |
| Plato 6x6 TW DALI DT8 | 45 | 4540 | 4,074 | 2,983 | 0,458 | 0,026 | 0,122 | 0,607 |

| Product | Manufacturing | | | | | | Distribution | Installation | Use | | | End of Life |
|----------------------------|--------------------|--------------|--------------|---------------------|------|--------------|--------------|--------------|-------------------------|------|------|-------------|
| | Structure and pack | Control gear | Light source | Lighting management | Max | Light source | | | Electricity consumption | Max | | |
| Plato 6x6 Opal DALI | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Plato 6x6 Opal | 1.00 | 0.74 | 1.00 | 0.96 | 1.00 | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.98 |
| Plato 6x6 Prisma | 1.00 | 0.74 | 1.00 | 0.96 | 1.00 | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.98 |
| Plato 6x6 Prisma DALI | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Plato 3x3 Opal | 0.28 | 0.61 | 0.53 | 0.76 | 0.76 | 0.31 | 0.37 | 0.53 | 0.37 | 0.53 | 0.31 | 0.31 |
| Plato 3x3 Prisma | 0.28 | 0.61 | 0.53 | 0.76 | 0.76 | 0.31 | 0.37 | 0.53 | 0.37 | 0.53 | 0.31 | 0.31 |
| Plato 3x3 Opal DALI | 0.28 | 0.84 | 0.53 | 0.79 | 0.84 | 0.33 | 0.37 | 0.53 | 0.37 | 0.53 | 0.33 | 0.33 |
| Plato 3x3 Prisma DALI | 0.28 | 0.84 | 0.53 | 0.79 | 0.84 | 0.33 | 0.37 | 0.53 | 0.37 | 0.53 | 0.33 | 0.33 |
| Plato 3x12 Opal | 1.04 | 0.74 | 1.00 | 0.96 | 1.04 | 1.01 | 1.04 | 1.00 | 1.00 | 1.00 | 1.00 | 1.01 |
| Plato 3x12 Prisma | 1.04 | 0.74 | 1.00 | 0.96 | 1.04 | 1.01 | 1.04 | 1.00 | 1.00 | 1.00 | 1.00 | 1.01 |
| Plato 3x12 Opal DALI | 1.04 | 1.00 | 1.00 | 1.00 | 1.04 | 1.03 | 1.04 | 1.00 | 1.00 | 1.00 | 1.00 | 1.03 |
| Plato 3x12 Prisma DALI | 1.04 | 1.00 | 1.00 | 1.00 | 1.04 | 1.03 | 1.04 | 1.00 | 1.00 | 1.00 | 1.00 | 1.03 |
| Plato 6x6 Nano | 1.00 | 0.74 | 1.00 | 0.96 | 1.00 | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.98 |
| Plato 6x6 Nano DALI | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Plato 6x6 Nano FS | 1.00 | 0.74 | 1.00 | 0.96 | 1.00 | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.98 |
| Plato 6x6 Nano FS DALI | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Plato 6x6 Opal Sense BT | 1.01 | 0.82 | 1.00 | 1.02 | 1.02 | 0.99 | 1.03 | 1.00 | 0.73 | 1.00 | 1.00 | 0.99 |
| Plato 6x6 Prisma Sense BT | 1.01 | 0.82 | 1.00 | 1.02 | 1.02 | 0.99 | 1.03 | 1.00 | 0.73 | 1.00 | 1.00 | 0.99 |
| Plato 6x6 Nano Sense BT | 1.01 | 0.82 | 1.00 | 1.02 | 1.02 | 0.99 | 1.03 | 1.00 | 0.73 | 1.00 | 1.00 | 0.99 |
| Plato 6x6 Opal IP65 | 1.16 | 1.90 | 1.00 | 1.12 | 1.90 | 1.23 | 1.07 | 1.00 | 1.00 | 1.00 | 1.00 | 1.23 |
| Plato 6x6 Prisma IP65 | 1.16 | 1.90 | 1.00 | 1.12 | 1.90 | 1.23 | 1.07 | 1.00 | 1.00 | 1.00 | 1.00 | 1.23 |
| Plato 6x6 Nano IP65 | 1.16 | 1.90 | 1.00 | 1.12 | 1.90 | 1.23 | 1.07 | 1.00 | 1.00 | 1.00 | 1.00 | 1.23 |
| Plato 6x6 Opal IP65 DALI | 1.16 | 2.12 | 1.00 | 1.22 | 2.12 | 1.25 | 1.07 | 1.00 | 1.10 | 1.10 | 1.10 | 1.25 |
| Plato 6x6 Prisma IP65 DALI | 1.16 | 2.12 | 1.00 | 1.22 | 2.12 | 1.25 | 1.07 | 1.00 | 1.10 | 1.10 | 1.10 | 1.25 |
| Plato 6x6 Nano IP65 DALI | 1.16 | 2.12 | 1.00 | 1.22 | 2.12 | 1.25 | 1.07 | 1.00 | 1.10 | 1.10 | 1.10 | 1.25 |
| Plato 6x6 TW DALI DT8 | 1.00 | 1.24 | 2.00 | 1.08 | 2.00 | 1.03 | 1.00 | 2.00 | 1.10 | 2.00 | 1.00 | 1.03 |




Environmental impacts

The evaluation of environmental impacts examines the manufacturing, distribution, installation, use and end of life stages of the reference product life cycle.

The impacts indicators and impact models used are the ones indicated by the PCR-ed4-EN-2021 09 14.

| | | Total | Manufacturing [A1 - A3] | Distribution [A4] | Installation [A5] | Use [B1] | Maintenance [B2] | Repair [B3] | Replacement [B4] | Refurbishment [B5] | Operational energy use [B6] | Operational energy use [B7] | Extrapolation rules applied to end-of-life stage [C1 - C4] | Extrapolation rules applied to benefits [D] |
|------------------------------|---------------------------|----------|-------------------------|-------------------|-------------------|----------|------------------|-------------|------------------|--------------------|-----------------------------|-----------------------------|--|---|
| PEF-GWP | kg CO2 eq | 1,31E+01 | 4,34E+00 | 8,54E-02 | 4,80E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,38E+00 | 0,00E+00 | 2,26E-01 | 7,65E-01 |
| PEF-GWPf | kg CO2 eq | 1,30E+01 | 4,33E+00 | 8,54E-02 | 4,59E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,33E+00 | 0,00E+00 | 2,19E-01 | 7,56E-01 |
| PEF-GWPlu | kg CO2 eq | 6,77E-02 | 8,05E-03 | 0,00E+00 | 2,09E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,06E-02 | 0,00E+00 | 6,95E-03 | 9,96E-03 |
| PEF-GWPlu | kg CO2 eq | 5,68E-09 | 5,68E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| PEF-ODP | kg CFC-11 eq | 4,47E-07 | 2,59E-07 | 1,11E-10 | 5,80E-10 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,63E-07 | 0,00E+00 | 2,39E-08 | 1,02E-07 |
| PEF-AP | mol H+ eq | 1,75E-01 | 3,42E-02 | 2,85E-03 | 1,27E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,36E-01 | 0,00E+00 | 1,97E-03 | 4,11E-03 |
| PEF-Epf | kg (PO4) ³⁻ eq | 5,27E-04 | 5,12E-06 | 2,94E-08 | 6,19E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,17E-04 | 0,00E+00 | 4,76E-06 | -1,50E-04 |
| PEF-Epm | kg N eq | 1,63E-02 | 3,42E-03 | 6,78E-04 | 6,11E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,13E-02 | 0,00E+00 | 8,72E-04 | 4,30E-04 |
| PEF-Ept | mol N eq | 5,40E-01 | 3,67E-02 | 7,42E-03 | 3,82E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,93E-01 | 0,00E+00 | 2,27E-03 | 3,68E-03 |
| PEF-POCP | kg CO2NM eq | 3,99E-02 | 1,19E-02 | 1,91E-03 | 8,86E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,47E-02 | 0,00E+00 | 7,19E-04 | 1,40E-03 |
| PEF-ADPn | kg Sb eq | 3,28E-04 | 3,19E-04 | 3,05E-09 | 1,06E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,63E-06 | 0,00E+00 | 1,15E-06 | -5,22E-05 |
| PEF-ADFP | MJ | 2,09E+03 | 6,89E+01 | 1,08E+00 | 4,32E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,01E+03 | 0,00E+00 | 3,41E+00 | 3,02E+01 |
| PEF-WU | m3 eq | 5,92E+01 | 7,83E-01 | 2,81E-04 | 3,37E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,06E-01 | 0,00E+00 | 5,76E+01 | -1,35E+02 |
| ERP | MJ | 8,52E+02 | 2,84E+00 | 1,38E-03 | 5,72E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,49E+02 | 0,00E+00 | 2,64E-01 | -2,57E+00 |
| ERM | MJ | 4,36E-01 | 4,36E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,09E-01 |
| ER | MJ | 8,53E+02 | 3,28E+00 | 1,38E-03 | 5,72E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,49E+02 | 0,00E+00 | 2,64E-01 | -1,96E+00 |
| ENRP | MJ | 2,09E+03 | 6,85E+01 | 1,08E+00 | 4,32E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,01E+03 | 0,00E+00 | 3,41E+00 | 2,68E+01 |
| ENRM | MJ | 3,91E-01 | 3,91E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,41E+00 |
| ENR | MJ | 2,09E+03 | 6,89E+01 | 1,08E+00 | 4,32E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,01E+03 | 0,00E+00 | 3,41E+00 | 3,02E+01 |
| USM | kg | 2,70E-01 | 2,70E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| URSF | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| UNRSF | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| NUFW-A2 | m³ | 1,62E+00 | 1,82E-02 | 6,55E-06 | 7,85E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,88E-02 | 0,00E+00 | 1,59E+00 | -3,59E+00 |
| HWD | kg | 2,91E+00 | 2,64E+00 | 0,00E+00 | 1,10E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,71E-01 | 0,00E+00 | -1,82E-19 | 2,99E-02 |
| NHWD | kg | 4,25E+00 | 2,16E+00 | 2,61E-03 | 1,85E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,07E+00 | 0,00E+00 | 8,90E-05 | 1,53E+00 |
| RWD | kg | 8,28E-04 | 6,09E-04 | 1,82E-06 | 2,23E-06 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,15E-04 | 0,00E+00 | 6,34E-08 | 5,70E-04 |
| CRU | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MRE | kg | 2,04E-02 | 2,04E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MER | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| EE | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Biogenic carbon of product | kg de C | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Biogenic carbon of packaging | kg de C | 0,00E+00 | 2,21E-01 | 0,00E+00 | -2,21E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| TPE | MJ | 2,94E+03 | 7,21E+01 | 1,08E+00 | 4,89E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,86E+03 | 0,00E+00 | 3,68E+00 | 2,82E+01 |
| PEF-PM | Déca/kg eq | 3,11E-06 | 1,91E-07 | 1,51E-08 | 7,66E-10 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,89E-06 | 0,00E+00 | 1,23E-08 | 1,40E-08 |
| PEF-IR | kBq U235 eq | 3,28E+02 | 4,64E+01 | 1,77E-04 | 6,73E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,81E+02 | 0,00E+00 | 1,74E-02 | 1,58E-01 |
| PEF-CTUe | CTUe | 1,81E+02 | 7,27E+01 | 5,23E-02 | 5,28E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 7,61E+01 | 0,00E+00 | 3,18E+01 | 4,46E+01 |
| PEF-CTUh-c | CTUh | 8,27E-09 | 1,58E-09 | 1,27E-12 | 4,98E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,52E-09 | 0,00E+00 | 1,85E-10 | -1,51E-09 |
| PEF-CTUh-nc | CTUh | 1,63E-07 | 7,98E-08 | 2,53E-10 | 1,92E-10 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 7,14E-08 | 0,00E+00 | 1,11E-08 | -3,30E-09 |
| PEF-LU | pas de dimension | 1,52E+00 | 5,05E-03 | 0,00E+00 | 1,20E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,58E-01 | 0,00E+00 | 5,58E-01 | -1,11E+01 |

Relative contribution of life cycle stages to impact categories

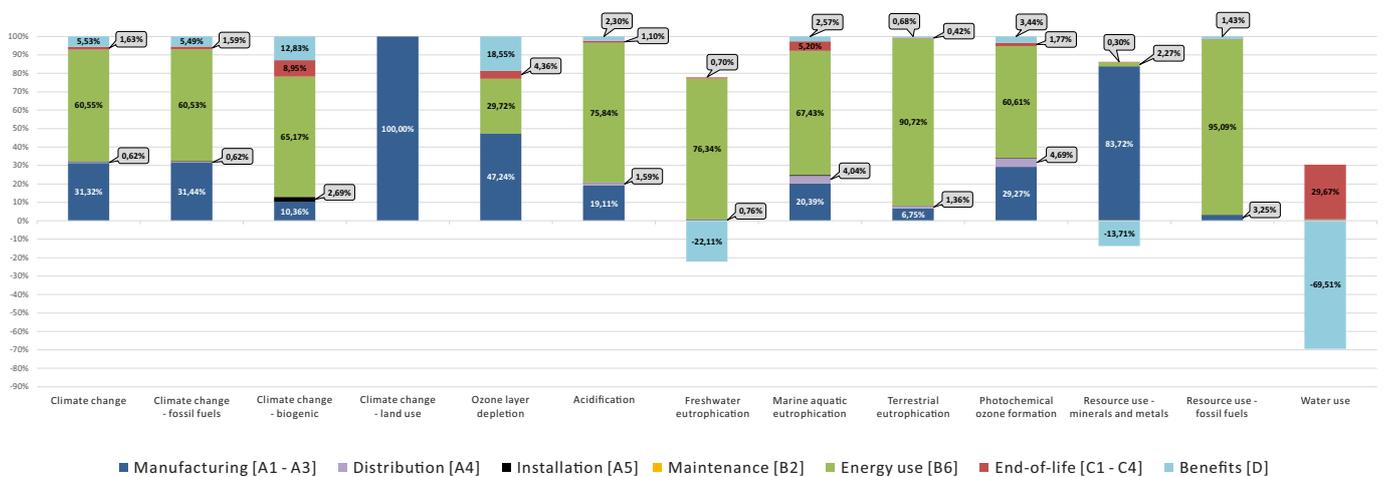



Environmental impacts

The evaluation of environmental impacts examines the manufacturing, distribution, installation, use and end of life stages of the reference product life cycle.

The impacts indicators and impact models used are the ones indicated by the PCR-ed4-EN-2021 09 14.

| | | Total | Manufacturing [A1 - A3] | Distribution [A4] | Installation [A5] | Maintenance [B2] | Operational energy use [B6] | Extrapolation rules applied to end-of-life stage [C1 - C4] | Extrapolation rules applied to benefits [D] |
|------------------------------------|--|----------|-------------------------|-------------------|-------------------|------------------|-----------------------------|--|---|
| Climate change | kg CO ₂ eq | 1,31E+01 | 4,34E+00 | 8,54E-02 | 4,80E-02 | 0,00E+00 | 8,38E+00 | 2,26E-01 | 7,65E-01 |
| Climate change - fossil fuels | kg CO ₂ eq | 1,30E+01 | 4,33E+00 | 8,54E-02 | 4,59E-02 | 0,00E+00 | 8,38E+00 | 2,19E-01 | 7,56E-01 |
| Climate change - biogenic | kg CO ₂ eq | 6,77E-02 | 8,05E-03 | 0,00E+00 | 2,09E-03 | 0,00E+00 | 5,06E-02 | 6,95E-03 | 9,96E-03 |
| Climate change - land use | kg CO ₂ eq | 5,68E-09 | 5,68E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Ozone layer depletion | kg CFC-11 eq | 4,47E-07 | 2,59E-07 | 1,11E-10 | 5,80E-10 | 0,00E+00 | 1,63E-07 | 2,39E-08 | 1,02E-07 |
| Acidification | mol H+ eq | 1,75E-01 | 3,42E-02 | 2,85E-03 | 1,27E-04 | 0,00E+00 | 1,36E-01 | 1,97E-03 | 4,11E-03 |
| Freshwater eutrophication | kg (PO ₄) ³⁻ eq | 5,27E-04 | 5,12E-06 | 2,94E-08 | 6,19E-07 | 0,00E+00 | 5,17E-04 | 4,76E-06 | -1,50E-04 |
| Marine aquatic eutrophication | kg N eq | 1,63E-02 | 3,42E-03 | 6,78E-04 | 6,11E-05 | 0,00E+00 | 1,13E-02 | 8,72E-04 | 4,30E-04 |
| Terrestrial eutrophication | mol N eq | 5,40E-01 | 3,67E-02 | 7,42E-03 | 3,82E-04 | 0,00E+00 | 4,93E-01 | 2,27E-03 | 3,68E-03 |
| Photochemical ozone formation | kg COVNM eq | 3,93E-02 | 1,19E-02 | 1,91E-03 | 8,86E-05 | 0,00E+00 | 2,47E-02 | 7,19E-04 | 1,40E-03 |
| Resource use - minerals and metals | kg Sb eq | 3,28E-04 | 3,19E-04 | 3,05E-09 | 1,06E-09 | 0,00E+00 | 8,68E-06 | 1,15E-06 | -5,22E-05 |
| Resource use - fossil fuels | MJ | 2,09E+03 | 6,89E+01 | 1,08E-00 | 4,23E-01 | 0,00E+00 | 2,01E+03 | 3,41E+00 | 3,02E+01 |
| Water use | m ³ eq | 5,92E+01 | 7,83E+01 | 2,81E-04 | 3,37E-03 | 0,00E+00 | 8,06E-01 | 5,76E+01 | -1,35E+02 |

The Global Warming Potential of the reference product is 13,1kg CO₂ distributed among the life cycle steps:



Contact Luminans if you have any questions regarding the calculation of coefficients for impacts others than those presented in this PEP

| | |
|---|---|
| Registration number: LUM-00002-V01.01-EN | Drafting rules: "PCR-ed4-EN-2021 09 06" Supplemented by "PSR-0014-ed2-FR-2023 07 13" |
| Verifier accreditation No.: VH48 | Information and reference documents: www.pep-ecopassport.org |
| Date of issue: 03-2024 | Validity period: 5 years |
| Independent verification of the declaration and data, in compliance with ISO 14025 : 2006 | |
| Internal: <input type="checkbox"/> | External: <input checked="" type="checkbox"/> |
| The PCR review was conducted by a panel of experts chaired by Julie Orgelet (Ddemail) | |
| PEPs are compliant with XP C08-100-1:2016 or EN 50693:2019 The components of the present PEP may not be compared with components from any other program. | |
| Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations" Indicator calculated with EF 3.0 methodology (EN 15804+A2:2019) | |

