



BLIND SPOT

640-00101012355

BLINDSPOT TURN R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9016, anti-glare LFO lens due to microfaceted structure beam 30°, light output direct, UGR <16, swiveling 172°, tilting 30°, without converter, max. 700mA, dimmability: see converter, IP20 please order accessories separately




DRAWING



TECHNICAL DETAILS

Bulb type	LED 9W
Luminous flux [lm]	400
Current sec. [mA]	700
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	LFO lens
Designer	Serge Cornelissen
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	30°
Material	aluminium
Length [mm]	62,8
Height [mm]	74
Diameter [mm]	62,8
Ceiling cutout [mm]	68
Ceiling thickness [mm]	32
Recess depth [mm]	100
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,28
Colour lamp	white
RAL	9016
EAN-Number	9008905740305
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

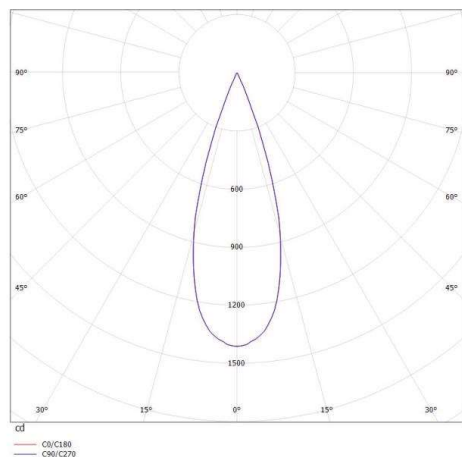

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.